

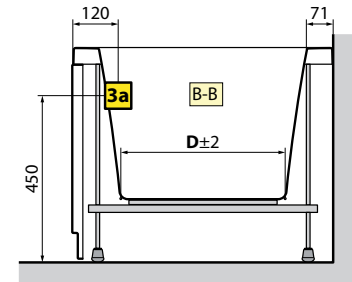




Wood Panels

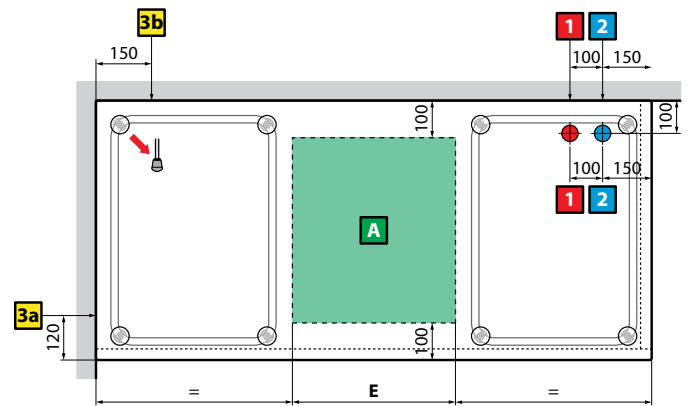

Acryl Panels

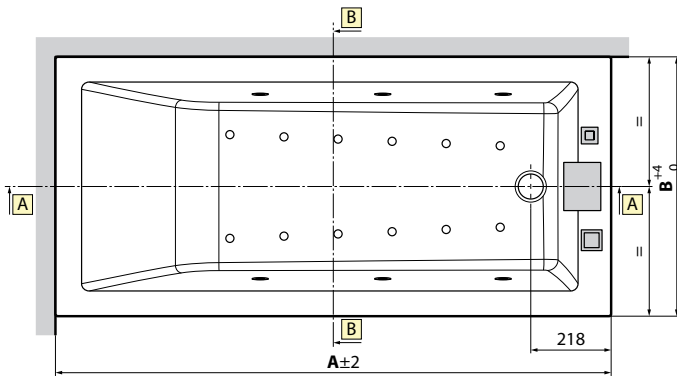

Model	A	B	C	D	E	Capacity litres
<b>150x70</b>	1500	700	979	444	300	150
<b>160x70</b>	1600	700	1081	444	400	160
<b>170x70</b>	1700	700	1183	444	500	170
<b>170x75</b>	1700	750	1183	494	500	180
<b>170x80</b>	1700	800	1183	544	500	190
<b>180x80</b>	1800	800	1285	544	600	200



Install a 30mA differential switch upstream of the appliance with a multiple-pole switch with a minimum contact opening  $\geq 3$  mm.

### HYDRAULIC CHARACTERISTIC

6 Whirlpool jets  
12 Airpool jets  
Siphon connection 1 1/2"

### ELECTRICAL CHARACTERISTIC

Tension: 220-230 V  
Frequency: 50 Hz  
Maximum power consumption: 950 W  
Whirlpool: 550 W  
Airpool: 400 W